

www.fineofloors.co.kr



2023 / 2024

FINEO VCT

FINEO | VINYL COMPOSITION TILE

유성 피네오 디렉스 타일

피네오골드 | 보니타 | 디렉스


yousung C&F
유성씨앤에프

제품의 특성 FINEO VCT Features



재질 및 구조

3mm 전체가 동일구조(Chip Through)로 되어 있어 처음과 같은 외관을 항상 유지함.

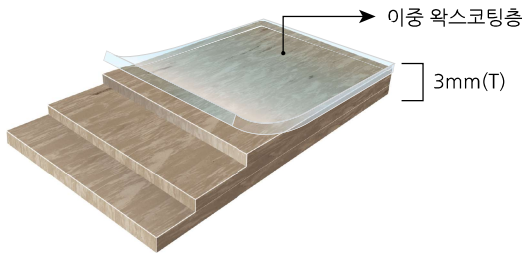

높은 내구성과 내마모성

오랜기간 사용해도 초기외관을 유지하는 중보행용 바닥재



경제성

합리적인 가격의 범위 바닥재



인테리어성

2칼라 베이스칩에 2~3칼라 스팟 칩으로 다양한 이미지를 구현



친 환경성

프탈레이트 가스제 Free, 중금속 Free의 친환경 바닥재

사용상 유의사항

- * 수분, 기름, 모래 등의 이물질은 제품의 변형이나 미끄러짐을 유발할 수 있으니 즉시 제거하여 주십시오.
- * 직사광선에 장시간 노출은 제품의 변형을 일으킬 수 있으니 주의하여 주십시오.
- * 화학약품, 수분 등에 노출은 제품의 변형을 일으킬 수 있으므로 오염 즉시 제거하여 주십시오.
- * 날카로운 물체나 무거운 물체는 찍힘이나 파손을 일으킬 수 있으므로 주의하여야 합니다.
- * 제품을 태우면 유독가스가 발생할 수 있으므로 반드시 허가받은 지정 산업폐기물 업자에게 위탁처리하여야 합니다.
- * 바닥의 오염제거, 청소시 중성세제를 사용해 주시고 필요시 약한 알칼용제를 사용하여 오염을 제거할 수 있습니다.

시공시 유의사항

- * 시공 바닥면은 충분한 강도와 평탄도를 유지하여 주십시오.
- * 시공 바닥면의 오염물질은 제거하여 주시고 바닥습도를 4.5% 이하로 유지하여 주십시오.
- * 시공전 로트번호 확인 후 반드시 동일로트 제품으로 시공하여 주십시오.
- * 시공시 온도는 18℃ 이상의 상온을 유지하여 주시고 타일과 접착제는 시공장에서 24시간이상 보관 후 사용하여야 합니다.
- * 기존 바닥재 및 합판 등에 중첩시공을 하지 마십시오.
- * 시공시 안전장비를 착용하여 주시고 접착제 또는 제품 특유의 냄새가 날 수 있으니 충분히 환기를 시켜주십시오.
- * 접착제 도포시 경량을 도포하고, 제품의 완전한 안착을 위해 시공 후 50kg 이상의 롤러로 충분히 압착하여 주십시오.
- * 온도 및 습도 변화가 심한장소 또는 물청소가 빈번하게 이루어지는 곳은 유성접착제를 사용하여 주십시오.

Installation Guide

- * Subfloor must be flat and hard. Dust, dirt and moisture must be removed.
- * Same batch product should be installed.
- * Subfloor temperature should be maintained at 18°C or above. Tile and adhesive should be kept in the location for 24 hours before installation.
- * Do not install FINEO VCT over loose subfloor like old VCT, LVT or plywood board.
- * Wear proper safety gears during installation and ventilate properly.
- * Subfloor must meet the condition of Dryness. Moisture level of subfloor must not exceed 4.5%.
- * Apply 50kg (or more) floor roller to press the tile enough after installation.
- * Proper adhesives and secure adhesion methods must be applied according to subfloor, temperature and traffic condition. Traditional acryl, rubber, epoxy and urethane adhesive can be considered or double-sided adhesion tape and spray adhesive also can be applied for FINEO VCT installation.

물성표 Physical Properties

한국산업규격

항 목		기 준		시험방법
압입량 mm	시험 온도	23℃	0.15 이상	KSM3802
		45℃	0.80 이하	
잔류 압입량 mm[A법]		0.25 이하		
가열에 의한 길이 및 폭의 변화율 %		0.20 이하		
흡수에 의한 길이 및 폭의 변화율 %		0.20 이하		
내오염성		현저한 색상의 변화 및 광택의 변화가 없어야 함		
미끄럼 저항성		표시값 이상		
방염성	잔염시간 s	20 이하		
	탄화깊이 mm	100 이하		

Federal Specifications

Technical data	RESULT		
Type of floor covering	Standard through-pattern Vinyl composition tile		
ASTM F 1066	Class 2 through pattern		
Tile Thickness	2,0mm / 2,5mm / 3,0mm		
Tile Size	300 x 300mm / 450 x 450mm		
Origin	South Korea		
Slip resistance ANSI B101.3	0.43, Meets R9		
Critical Radiant Flux ASTM E 648	Class 1, >0.45 W/cm²		
Smoke Density ASTM E 662	1450		
Flame Spread ASTM E 84	25, NFPA Class A, UBC Class 1		
Static load limit ASTM F 970	2,0mmT - 150 PSI / 3,0mmT - 250 PSI		
Recycled content	Min 10% post and pre-consumer		
Eco Green Building Material KS Eco Product	Reduced indoor air pollutants		
Warranty	5 years Manufacturing defects 10 years commercial on normal wear and tear		
Maintenance	Conventional VCT floor maintenance Floor finish coat for VCT recommended depending on traffic		
Weight	21kg / box		
Packing	M2 / Box	2,0mm T	3,0mm T
	300 x 300mm	4,95m²	3,33m²
	450 x 450mm	4,88m²	3,24m²

Comply with ASTM F 1066, KS M 3802, JIS A 5705.

피네오 골드 두께(Thickness), 규격(Dimension):
3.0mm X 450mm X 450mm 16pcs/Box(3,24m²)

FINEO VCT
FINEO | VINYL COMPOSITION TILE

FINEO GOLD VCT



FG 01




FG 02



FG 03

DEFINE NEO SPACE
FINEO VCT

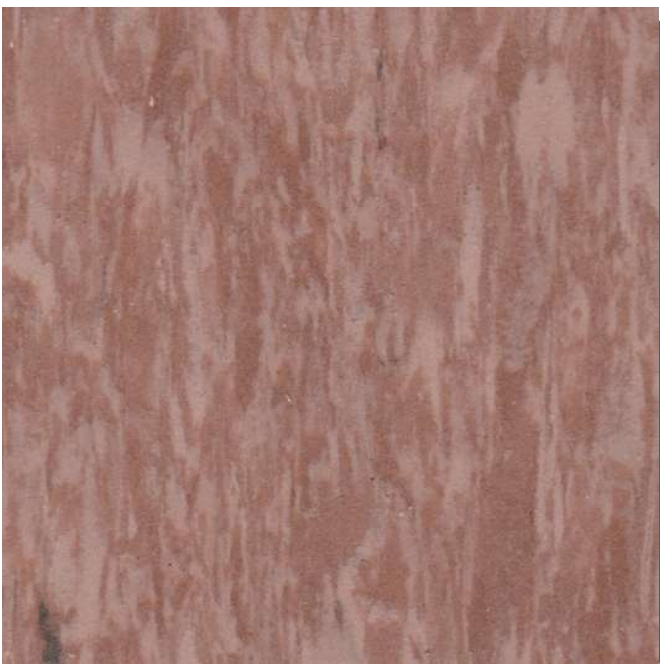

FG 04



FG 05

보니타

두께(Thickness), 규격(Dimension):
3.0mm X 450mm X 450mm 16pcs/Box(3.24m²)

FINEO VCT
FINEO | VINYL COMPOSITION TILE

FINEO **BONITA** VCT



BT 101



BT 102

Most economical homogeneous
floor tile for heavy traffic area
FINEO VCT



BT 103



BT 104




BT 106

디럭스

두께 (Thickness) 규격(Dimension)
2,0mm X 300mm X 300mm 55pcs/Box(4,95m²)
3,0mm X 300mm X 300mm 37pcs/Box(3,33m²)
3,0mm X 450mm X 450mm 16pcs/Box(3,24m²)

FINEO VCT
FINEO | VINYL COMPOSITION TILE

FINEO DELUXE VCT



YD 919



YD 886




YD 891




YD 923



YD 913



YD 890



YD 888



YD 921



YD 910



YD 895




YD 911




YD 887



YD 897



YD 925



YD 924





FINEO VCT
FINEO | VINYL COMPOSITION TILE
피네오 디렉스 타일

제조, 판매

yousung C&F
유성씨앤에프



서울사무소 : 서울시 강남구 역삼로 121 유성빌딩 10층(06243) 전화: 02-2189-2000 팩스: 02-567-0861
원주공장 : 강원도 원주시 우산공단길 8-33 (26336)

SEOUL Office : 10th Floor, Yousung Bldg, 121, Yeoksam-ro, Gangnam-gu, Seoul, Republic of Korea (06243)
WONJU Factory : 8-33, Usangongdan-gil, Wonju-si, Gangwon-do, Republic of Korea (26336)