




HOMOGENEOUS PVC CONDUCTIVE TILE

ESD TILE

CATALOGUE

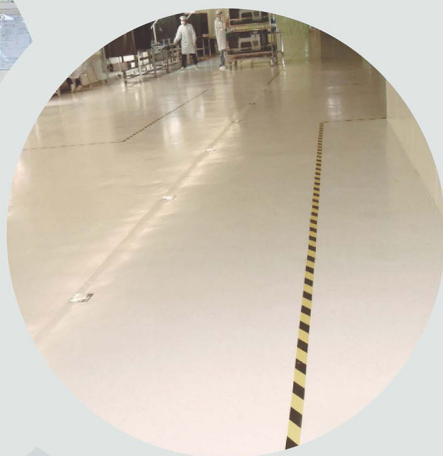

JIANGSU HUAJING FLOOR TECHNOLOGY CO.,LTD





We also provide:

Welding Rod



White



Green



Grey



Yellow



Red



Blue



Dark grey



Silver

Copper Foil



Conductive Glue




Installation



Products Size: 600 X 600 X 2mm / 600 X 600 X 3mm
610 X 610 X 2mm / 610 X 610 X 3mm

Normal Items

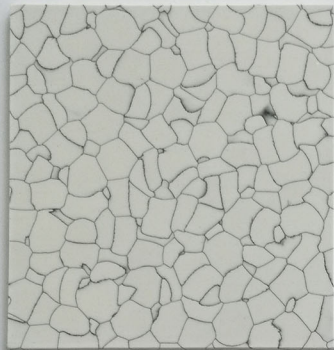


HJ-1103




HJ-1101



PJD-01

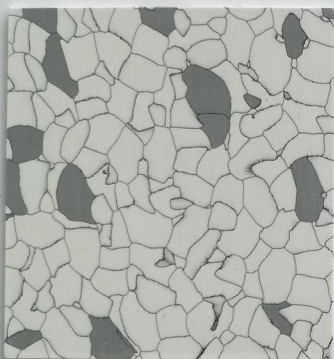


HJ-1104

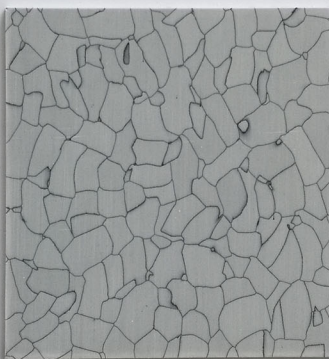


PJD-06




PJD-901

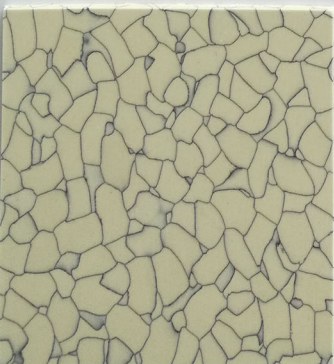

PJD-903

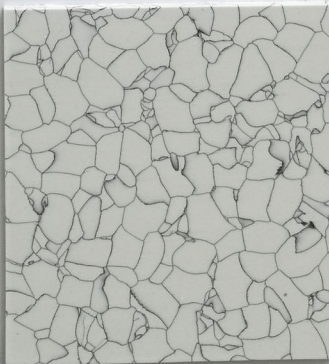

PJD-9022

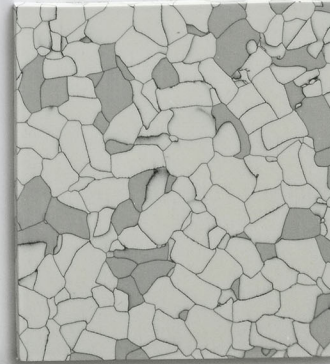

PJD-909

Products Size: 600 X 600 X 2mm / 600 X 600 X 3mm
610 X 610 X 2mm / 610 X 610 X 3mm

Special Items



HJ-202101




HJ-202102



HJ-202103




HJ-202104

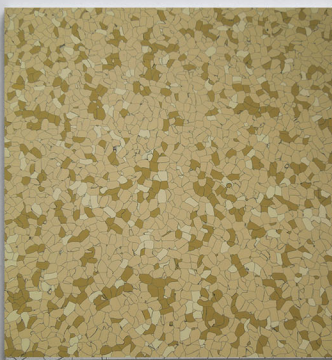


HJ-202105



HJ-202106

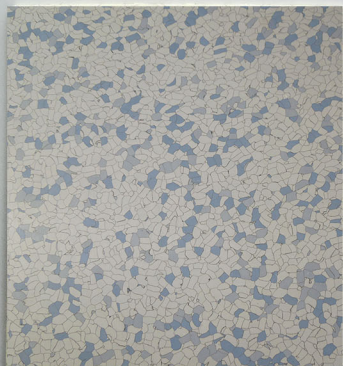


HJ-202107

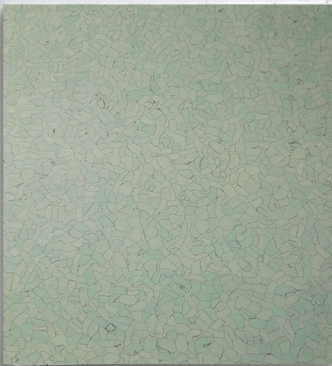


HJ-202108

Products Size: 600 X 600 X 2mm / 600 X 600 X 3mm
610 X 610 X 2mm / 610 X 610 X 3mm

Special Items

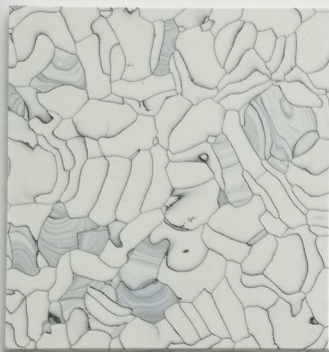


HJ-609

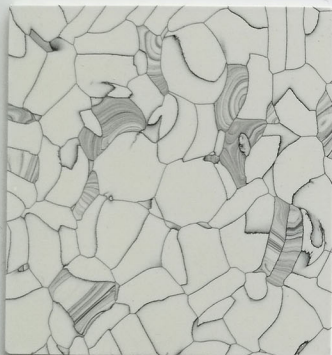


HJ-603



HJ-608

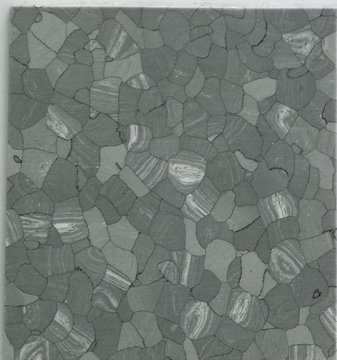

HJ-605

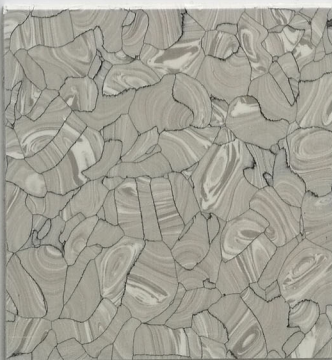

HJ-606



HJ-607

Products Size: 600 X 600 X 2mm / 600 X 600 X 3mm
610 X 610 X 2mm / 610 X 610 X 3mm

Special Items




HJ-808




HJ-809



HJ-803

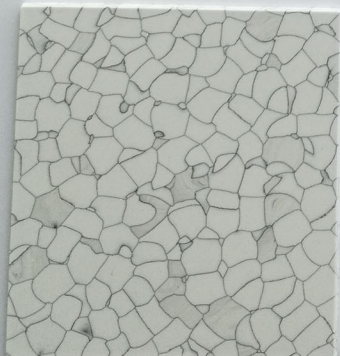

HJ-801

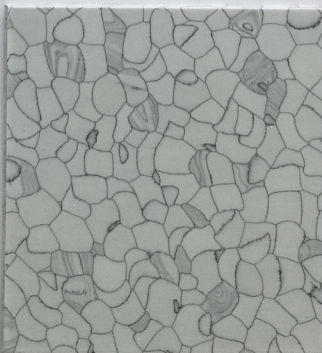

HJ-805



HJ-807

Technical Data

Item		Conductive tile	Dissipative tile
	Thickness EN428	2.0mm 2.5mm 3.0mm	2.0mm 2.5mm 3.0mm
	Size EN426	600 x 600mm 900 x 900mm	610 x 610mm 900 x 900mm
	Weight EN430	2.0mm: 3.8kg/m ² 2.5mm: 4.8kg/m ² 3.0mm: 5.8kg/m ²	2.0mm: 3.8kg/m ² 2.5mm: 4.8kg/m ² 3.0mm: 5.8kg/m ²
	Electric properties DIN51953、ASTMF-1550 or NFPA99	2.5 x 10 ⁴ ~10 ⁶ Ω	10 ⁶ ~10 ⁹ Ω
	Decay time SJ/T10694-2006(IV<100V)	EQUAL 0.4S	EQUAL 0.4S
	Charge voltage SJ/T10694-2006(IV<100V)	EQUAL 70	EQUAL 70
	Fire resistance grade DIN 4102	B1	B1
	Combustion properties SJ/T11236-2001(<10S,reach FV-0)	EQUAL 0.35s IFV-0	EQUAL 0.35s IFV-0
	Amount of anti-wear SJ/T11236-2001 (≤0.020g/cm ³ ,100r)	EQUAL 0.014	EQUAL 0.014
	Anti-wear Properties EN660pl ₂	T group ITEN-T < 2.0mm ³	T group ITEN-T < 2.0mm ³
	Wheel pressure EN425	No influence	No influence
	Residual concavity EN433、DIN51955	0.03mm(2.0mm) 0.035mm(2.5mm) 0.04mm(3.0mm)	0.03mm(2.0mm) 0.035mm(2.5mm) 0.04mm(3.0mm)
	Dimensional stability EN 434	≤0.10%	≤0.10%
	Color fastness IDO105BO2	At least 6	At least 6
	Resistance to chemicals DIN423、DIN51958	Offers excellent resistance ask for special sheet	Offers excellent resistance ask for special sheet
	Impact sound absorption VLI、ISO104、ISO717	Approx 2dB	Approx 2dB
	Standard for health care facilities NFPA99	Confirms to the requirement of NFPA99 in effect at the tine of installation	

Patrick Sales Manager

T E L:86-13584386425 (Wechat and What' s up)

EMAIL: hjpatrick01@gmail.com

patrick.aldington@gmail.com

WWW: en.floor.cn/