



DECOTILE FLOORING

Luxury tile




Tiles




Plank

Decotile Wood




IB 3010

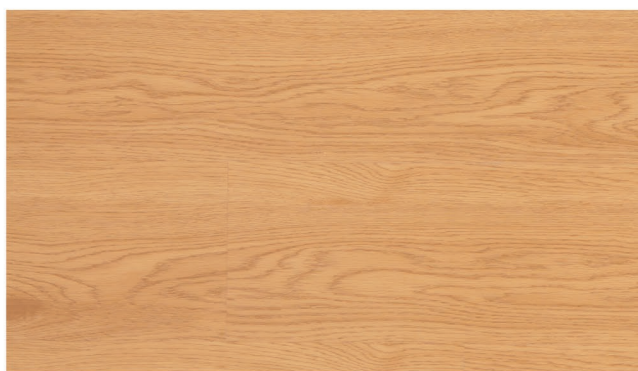

IB 3027




IB 3035

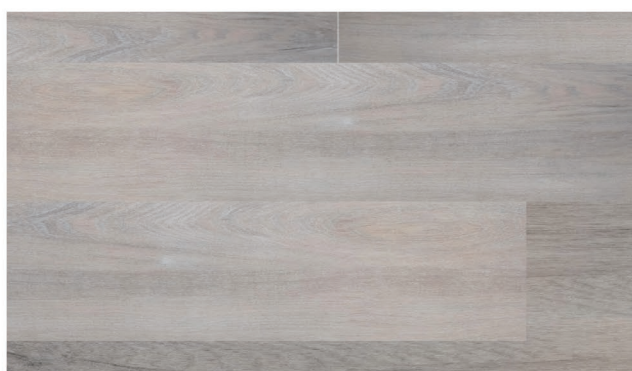

IB 3014




IB 3719

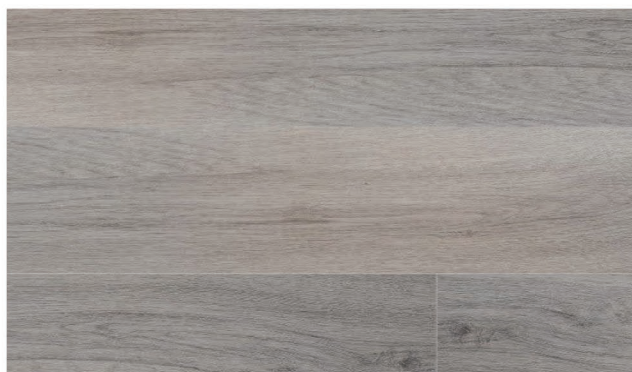

IB 3020

Size: (W) 152.4mm x (L) 914.4mm x (T) 3.0mm- 24PCS (3.34 M2)/Box

Decotile Stone



IS 2201



IS 2203



IS 2200



IS 2273




IS 2209



IS 2003



IS 2002

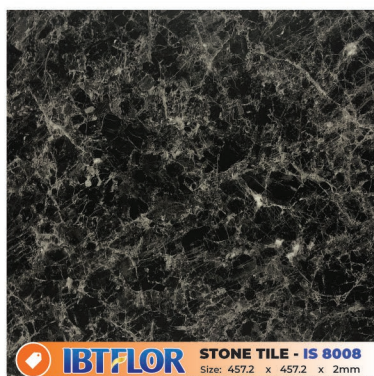

IS 2008



IS 2005



IS 2242




IS 2243



IS 2010

Size: (W) 457.2mm x (L) 457.2mm x (T) 3.0mm- 16PCS (3.34 M2)/Box


Decotile Carpet



IC 8001



IC 8002

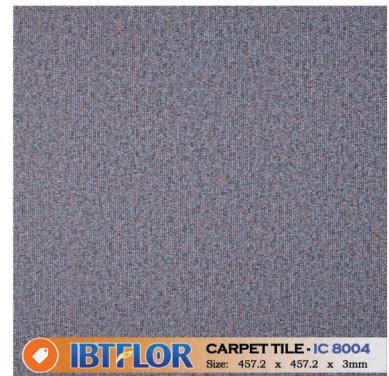

IC 8004



IC 8006



IC 8005



NC 001

Size: (W) 457.2mm x (L) 457.2mm x (T) 3.0mm- 16PCS (3.34 M2)/Box

LVT TECHNICAL DATASHEET

DESCRIPTION	STANDARD	UNIT	DECOTILE
Total Thickness	ASTM F386 : 11	mm	3,0
Thickness of the wearlayer	EN 429 : 1993	mm	0,2
Weight	EN 430 : 1994	g/m ²	~5330
Size	ASTM F2055 - 10	mm	457,2 mm x 457,2 mm – 16 pcs / 3,34m ² 152,4 mm x 914,4 mm – 24 pcs / 3,34m ²
CLASSIFICATION			
Fire Rating	EN 13501 - 1	class	Bfl-s1
Slip Resistance Wet	EN 51130 : 2010	class	R9
PERFORMANCES			
Wear Resistance	EN 660-2:1999	mm ³	< 2,0
Wear Group	-	group	T
Phthalate content	EN 14372 : 2004	%ppm	≤ 0,1
Dimensional stability (Shrinkage)	EN 434 : 1994	%	≤ 0,25
Dimensional stability (curling)	-	mm	≤ 2,0
Residual Indentation	EN 433 : 1994	mm	≤ 0,1
Castor chair test	EN 425 : 1994	-	OK
Thermal Conductivity	EN ISO 10456	W/(m.K)	0,25
Colour Fastness	EN ISO 105-B02	degree	≥ 6
Surface Treatment	-	-	Pur
Toxic Element	EN 71-3 : 1995	-	Pass
Fungus test	ASTM G21: 1999	-	Pass
Chemical Products Resistance	EN 423 : 1993	-	Pass

* The implementation of an effective cleaning method is the best defence against infection

 RECYCLED CONTENT	 COMPOSITION	 WELLNESS	 INSTALLATION	 INDOOR AIR QUALITY	 RECYCLABILITY
--	--	---	---	--	--

Be connected!



IBTFLOR
IBTFLOR