

iQ Granit SD

HOMOGENEOUS COMPACT VINYL

Homogeneous
conductive
and dissipative
solutions

phthalate free
100%




ROLL




TILE

HOMOGENEOUS
COMPACT VINYL

iQ Granit SD

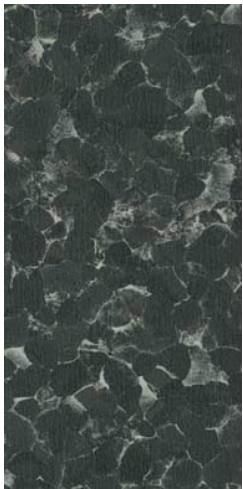

© 3096 953 □ 3097 953

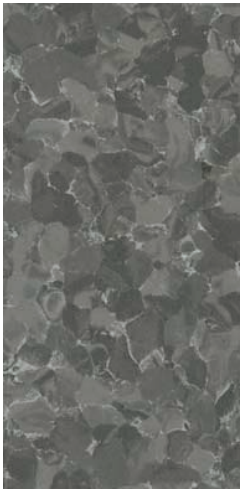

© 3096 950 □ 3097 950



© 3096 949 □ 3097 949



© 3096 948 □ 3097 948



© 3096 395 □ 3097 395



© 3096 476 □ 3097 476




© 3096 980 □ 3097 980



© 3096 994 □ 3097 994



© 3096 475 □ 3097 475

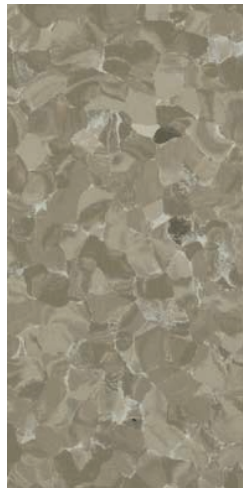

© 3096 436 □ 3097 436



© 3096 467 □ 3097 467



© 3096 468 □ 3097 468



© 3096 474 □ 3097 474



© 3096 954 □ 3097 954

iQ GRANIT SD

Datasheet

Classification	Norm	Tarkett Value	Test Report
Product type	ISO 10581	Permanently static dissipative pressed	
Commercial classification	ISO 10874	34 Very Heavy	
Industrial classification	ISO 10874	43 Heavy	
Technical Characteristics	Norm	Tarkett Value	Test Report
Country of origin		Sweden	
Surface treatment		New iQ PUR	
Total thickness	ISO 24346	2 mm	
Wear layer thickness	ISO 24340	2 mm	
Total weight	ISO 23997	2800 g/m ²	
Binder content	ISO 10581	Type I	
Installation method		Glue-Down	
Format Type		Tile	
Items per box		14	
Surface per box		5.2 m ²	
Performance for CE Marking	Norm	Tarkett Value	Test Report
Static Eletrical Propensity	EN 1815	Antistatic (≤ 2 kV)	Down load
Declaration of Performance #	EN 14041	0019-0033-DoP-2013-07	Down load
Slip resistance	DIN 51130	R9	Down load
Slip resistance	EN 13893	Class DS ($\mu \geq 0,30$)	
Thermal resistance (m ² •K/W)	EN 12667 / ISO 10456	-0,010 m ² •K/W	Down load
Technical Performance	Norm	Tarkett Value	Test Report
Castor chair effect	ISO 4918	Suitable	
Electrical resistance	ESD-approval SP-method 2472	$R \leq 1 \times 10^9 \Omega$	Down load
	EN 1081	$R_1 \leq 10^8 \Omega$	Down load
	EN/IEC 61340-5-1 / 100 V	$R \leq 10^8 \Omega$	Down load
Clean room	ISO 14644-1	ISO class 4	Down load
Reaction to fire	EN ISO 13501-1	Bfl -s1	Down load
	EN ISO 9239-1	≥ 8 kW/m2	Down load
	EN ISO 11925-2	Pass	Down load
Fungi and bacteria resistance	ISO 846 - Part C	Does not promote growth	Down load
Chemical resistance ISO	ISO 26987	Excellent Resistance	Down load
Underfloor heating		YES_27	
Colour fastness to light	ISO 105-B02	≥ 7	Down load
Sustainability, Environment & Indoor Air Quality	Norm	Tarkett Value	Test Report
Recycled content		25.5%	Down load
ReStart® Ready		Yes	Down load
Phthalate - free		Yes	Down load
Total VOC emissions	ISO 16000-6	$\leq 10 \mu\text{g}/\text{m}^3$ (after 28 days	Down load
	Indoor air quality	Platinum	
Dimensions and designs	Norm	Tarkett Value	Test Report
Roll	Roll 2x23m		
Tile	Tile 610 x 610 mm - 14 Tile=5.2 m ² /box - 40 box/pallet		
Number of designs available	14		
Certificate			Test Report
Floorscore			Down load
Singapore Green Building			Down load
ISO 9001:2015			Down load
ISO 14001:2015			Down load
ISO 45001:2018			Down load



The above information is subject to modification for the benefit of further improvement (05/05/2022). Tarkett reserves the right to maned this specification without giving prior notice. For the latest versions of the technical specifications, visit professional.tarkett.com

